

How to Fix a Tamper Alarm Problem with Honeywell Transmitters

1. Locate the problem transmitter or the transmitter zone that is having the problem.




2. Remove the cover by depressing the clip and lifting that side of the cover up.



3. Locate the tamper pin on the under side of the cover and wrap electrical tape around it to build up the tamper pin to allow it to depress the tamper lever better.



4. Replace the cover back on the transmitter by locating the cover hooks on the transmitter base and the cover hook slots on the under side of the cover and lining them up and then clip the cover back onto the base. Make sure that the cover is seated properly on the base and that it is locked in place. You should see the same gap all the way around the transmitter when seated properly.

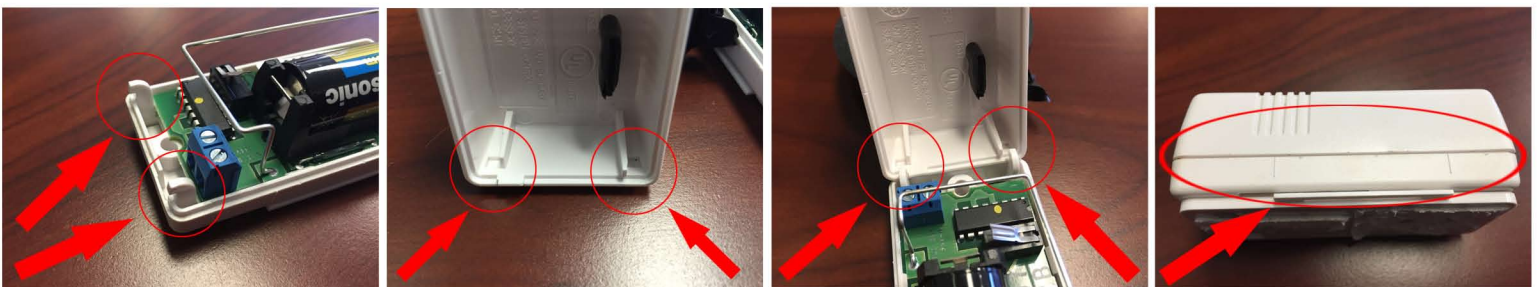

5. Go to your keypad and type [your code] + 1 [Off] twice to clear the check on your keypad. If this does not clear the check, open and close that zone (door/window) twice and then repeat disarm process. Then test your system by making sure to make that zone go into alarm and send a signal to the central station and call them to confirm.